

## Telephone Distribution Panel



### FEATURES

19" 3U telephone distribution panel c/w LSA base. Lockable with screw and transparent front panel

**Designed for telephone distribution in cabinet Capacity:** 150 pair.  
Base for LSA included.

### COMPLIANCES

UL and cUL

**Surface Treatment:** Fosfat coating

**Painting:** Ral7035 / Ral9005

### STANDARDS

ISO 9001:2000

TSE:EN 61587-1 Mechanical Structures For Electronic Equipment - Tests For IEC 60917 And IEC 60297

**Climatic and Environment:** EN 61587-1/4.2, IEC60068-2-1, IEC60068-2-2, IEC60068-2-30,


**Flammability:** EN61587-1/6.3

Material Definition and Properties, Thicknesses and Shipment Configuration

Part Definition		Material definition & properties	Shipment Configuration
Front Panel	1,20 mm	DIN EN 10130 - 99 EREGLI DC-01 6112 CRS	1 ea.
Main Body	1,50 mm	DIN EN 10130 - 99 EREGLI DC-01 6112 CRS	1 ea.
C-rail	1,00 mm	DIN EN 10130 - 99 EREGLI DC-01 6112 CRS	1 ea.

# Telephone Distribution Panel

## TECHNICAL DRAWINGS

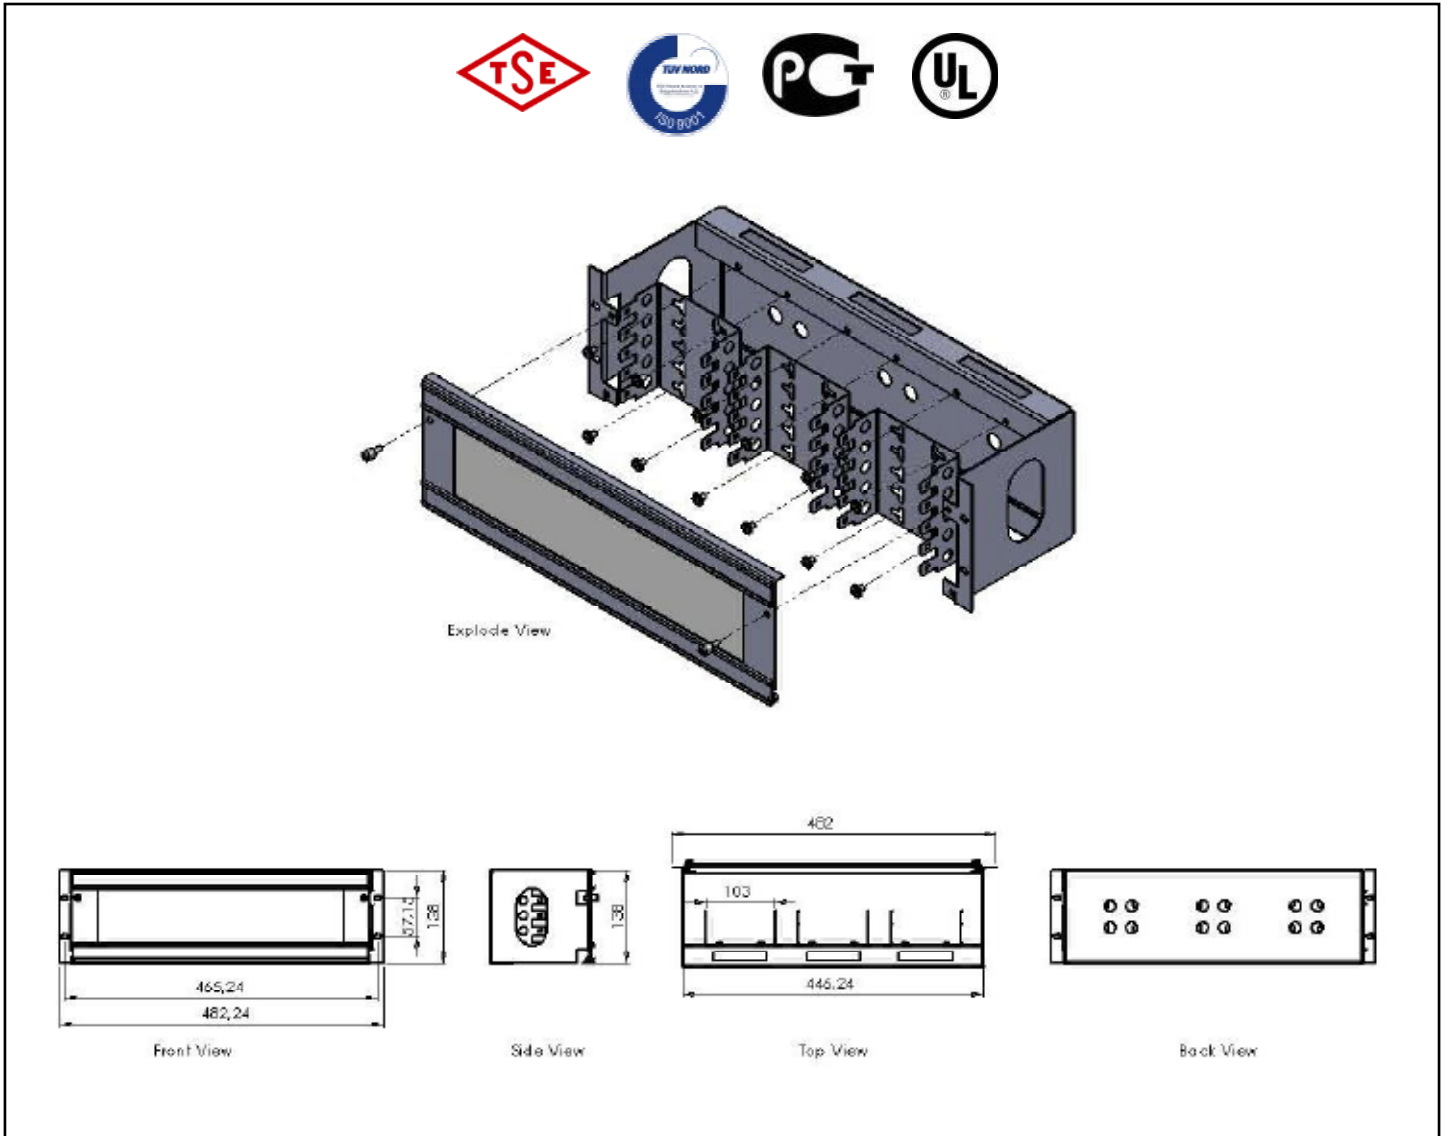

Telephone Distribution Panel		
Order No	Product Definition	Dimensions (wxdxh) mm
M68TLD3U	3U 19" telephone distribution panel	483x150x139

Shipping Data				
Order No	Quantity	Shipping Dimension (palette) WxHxD	Net Weight (kg)	Gross Weight (kg)
M68TLD3U	4	540x440x490	12,560	14,000