



ESTAP EUROLINE 19" wall mounting cabinets provide an economic solution cabling installations. This series is a range of wall mounted enclosures used in offices for horizontal segments where a reduced amount of U height is required. Again the aesthetics creating a pleasing and professional look. Attention to styling with light grey Ral7035 with silk screen design mean that cabinets can be deployed in the most demanding of office environments when looks really matter. Front door is nice looking decorative pattern. Optimal mounting, hinging and panel mounting arrangements create a variety of equipment mounting an access arrangements. This allow the EUROLINE to be used in almost all locations. Completely standart EUROLINE wall mounting cabinet is delivered as a single enclosure and assembled.

19" EUROLINE wall mounting cabinets



FEATURES

EASY TO ACCESS

Openable, lockable front door features a full-lenght smoked and shatterproof glass door with decorative silk screen pattern and integral locking mechanism.
Side doors; lockable, removable complete with a locks.

Cable access

Multiple cable entry points with brush, on top (1ea) and bottom(1ea), provide maximum versatility.

Construction

Rigid welded frame construction is in steel sheet tube. Corner of bases have welded tube on each corner that tightly fixed into the clumns gives maximum stabiloity.

Open with wiremesh fan protection on top cover provide passive heat transportation via convection. There are vented fan holes suitable for cooling unit. (see accessories)

19" mounting angles (front/2ea.) allow for fleible configuration and adjustable in depth.

Extensive range of accessories.

Front door features a full-lenght smoked and shatterproof glass door with decorative silk screen pattern and integral locking mechanism.
Side doors; lockable, removable complete with a locks.

STANDARDS

ISO 9001:2000

TSE:EN 61587-1 Mechanical Structures For Electronic Equipment - Tests For IEC 60917 And IEC 60297

Climatic and Environment: EN 61587-1/4.2, IEC60068-2-1, IEC60068-2-2, IEC60068-2-30,

Static Mechanical Load Lifting: EN61587-1/5.2.1

Static Mechanical Load Stiffness: EN61587-1/5.2.2

Dynamic Mechanical Load Vibration and Shock, Impact:

EN61587-1/5.3.1, EN61587-1/5.3.3, IEC60068-2-6,

IEC60068-2-27,

Earth Bond: EN61587-1/6.2

Flammability: EN61587-1/6.3

Degrees Of Protection Provided By Enclosures (Ip Code):

IP20 or IP55, EN61587-1/6.4

COMPLIANCES

UL and cUL

Load Carrying Capacity: 50 kg

Surface Treatment: Fosfat coating

Painting: Ral7035


IP20 or IP55, EN61587-1/6.4

Material Definition and Properties, Thicknesses and Shipment Configuration

Part Definition	Material thickness	Material definition & properties	Shipment Configuration
Main Body	0,8 mm	DIN EN 10130 - 99 EREGLI DC-014 6112 CRS	1ea.
Front Door	1,50 mm	DIN EN 10130 - 99 EREGLI DC-01 6112 CRS & 4mm SECURE AND TEMPERED GLASS AND LOCK	1ea.
19" mounting angles	1,50 mm	DIN EN 10130 - 99 EREGLI DC-014 6112 & GALVANIZED COATING	2ea. at front
Side Panels	0,8 mm	DIN EN 10130 - 99 EREGLI DC-014 6112 CRS	2ea.
Frame	1,00 mm	DIN EN 10130 - 99 EREGLI DC-014 6112 CRS	4ea.
Profil assembling part	1,50 mm	DIN EN 10130 - 99 EREGLI DC-014 6112 CRS	2ea.

19" EUROLINE wall mounting cabinets (600x450mm)

TECHNICAL DRAWINGS

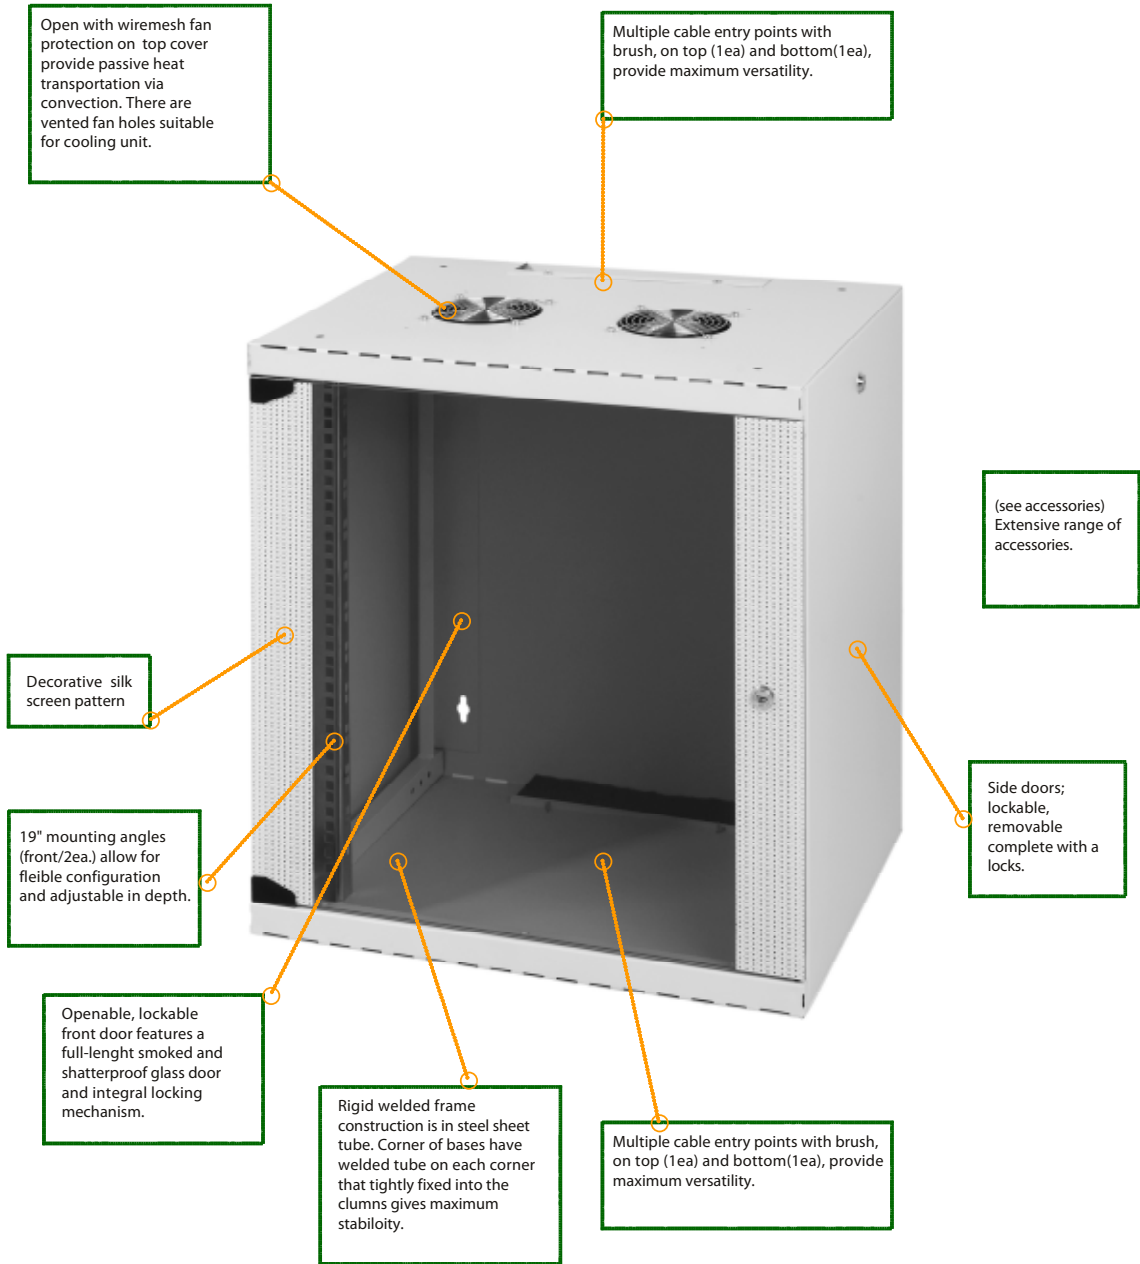


19" Euroline Wall Mounting Cabinets width=600mm depth=450			
Order No	U=44.45 (mm)	h= inside height(mm)	H = outside height(mm)
EU 7U450	7	333	402
EU 9U450	9	422	491
EU 12U450	12	555	624
EU 16U450	16	733	802

Shipping Data						
Order No	Quantity	Shipping Dimension (palette) WxDxH	Net Weight (kg)	Gross Weight (kg)	Shipping configuration depth (mm)	Max 19" depth
EU 7U450						340
EU 9U450						340
EU 12U450						340
EU 16U450						340

19" EUROLINE wall mounting cabinets (600x600mm)

TECHNICAL DRAWINGS

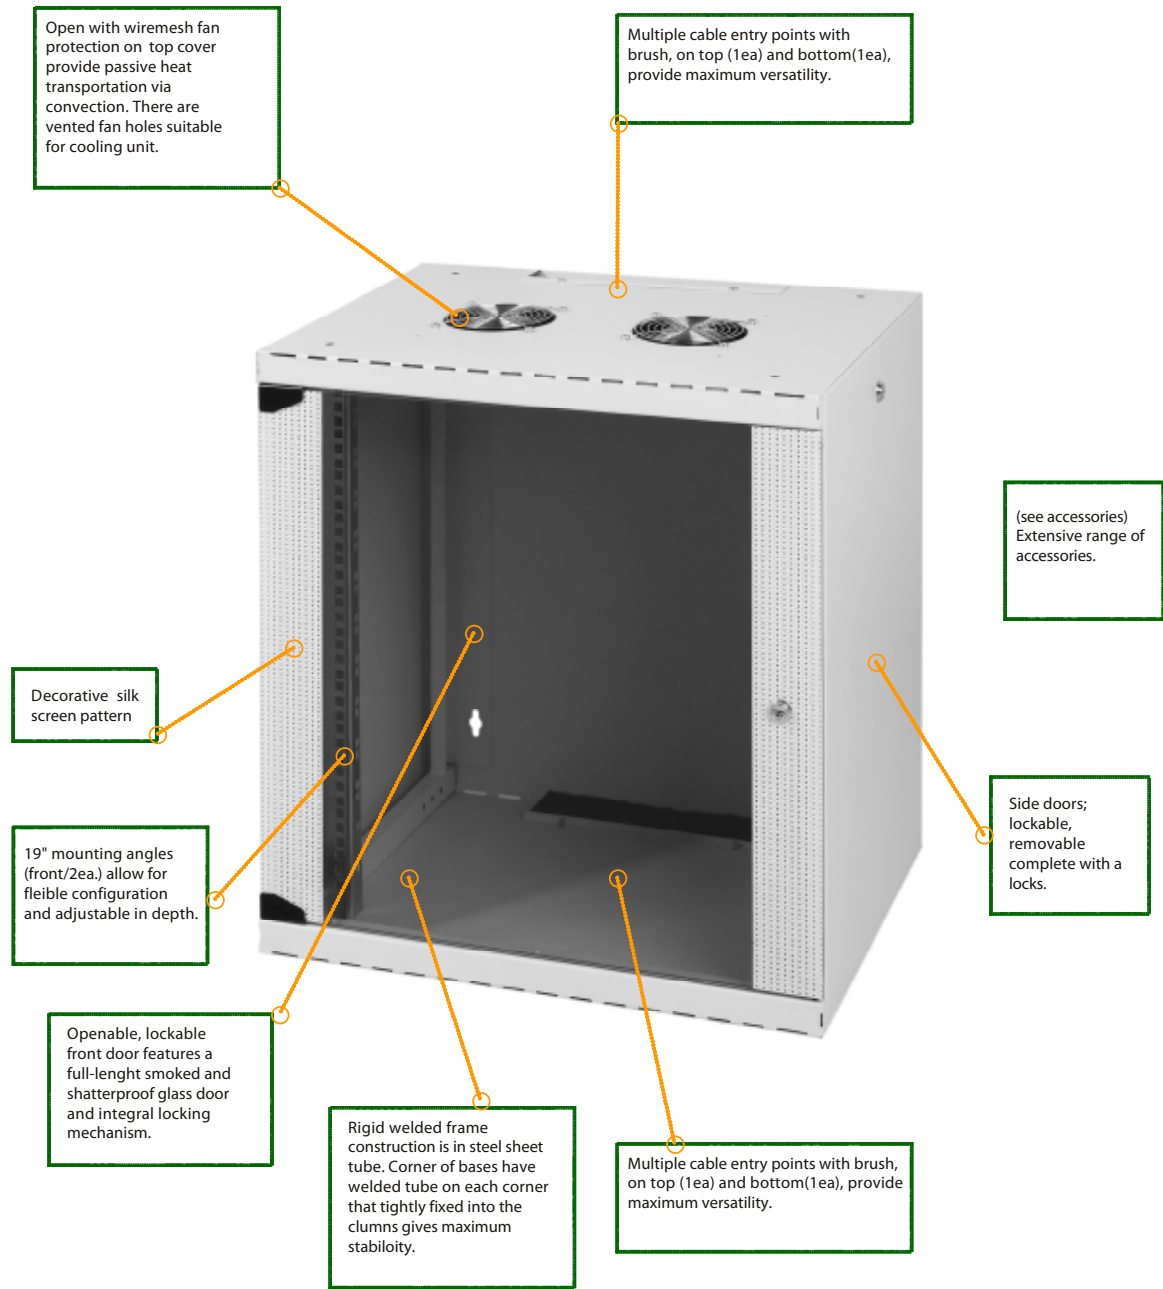

19" Euroline Wall Mounting Cabinets width=600mm depth=600m			
Order No	U=44.45 (mm)	h = inside height(mm)	H = outside height(mm)
EU 7U600	7	333	402
EU 9U600	9	422	491
EU 12U600	12	555	624
EU 16U600	16	733	802

Shipping Data						
Order No	Quantity	Shipping Dimension (palette) WxDxH	Net Weight (kg)	Gross Weight (kg)	Shipping configuration depth (mm)	Max 19" depth
EU 7U600						500
EU 9U600						500
EU 12U600						500
EU 16U600						500